


ATLAS PLATINUM

PVL Quadro

Four Post Wheel Alignment Lift

The PVL Quadro is a premium quality 4 Post lift with integral alignment platform, built with durability in mind in the true Atlas Platinum style.

Available in 2 platform lengths, 4.5m and 4.8m, the lift boasts a 4200kg lifting capacity, cable synchronization, and ultra-secure, automatically-engaging locking facility, making it perfect for wheel alignment application where consistent positioning of the platforms is crucial.

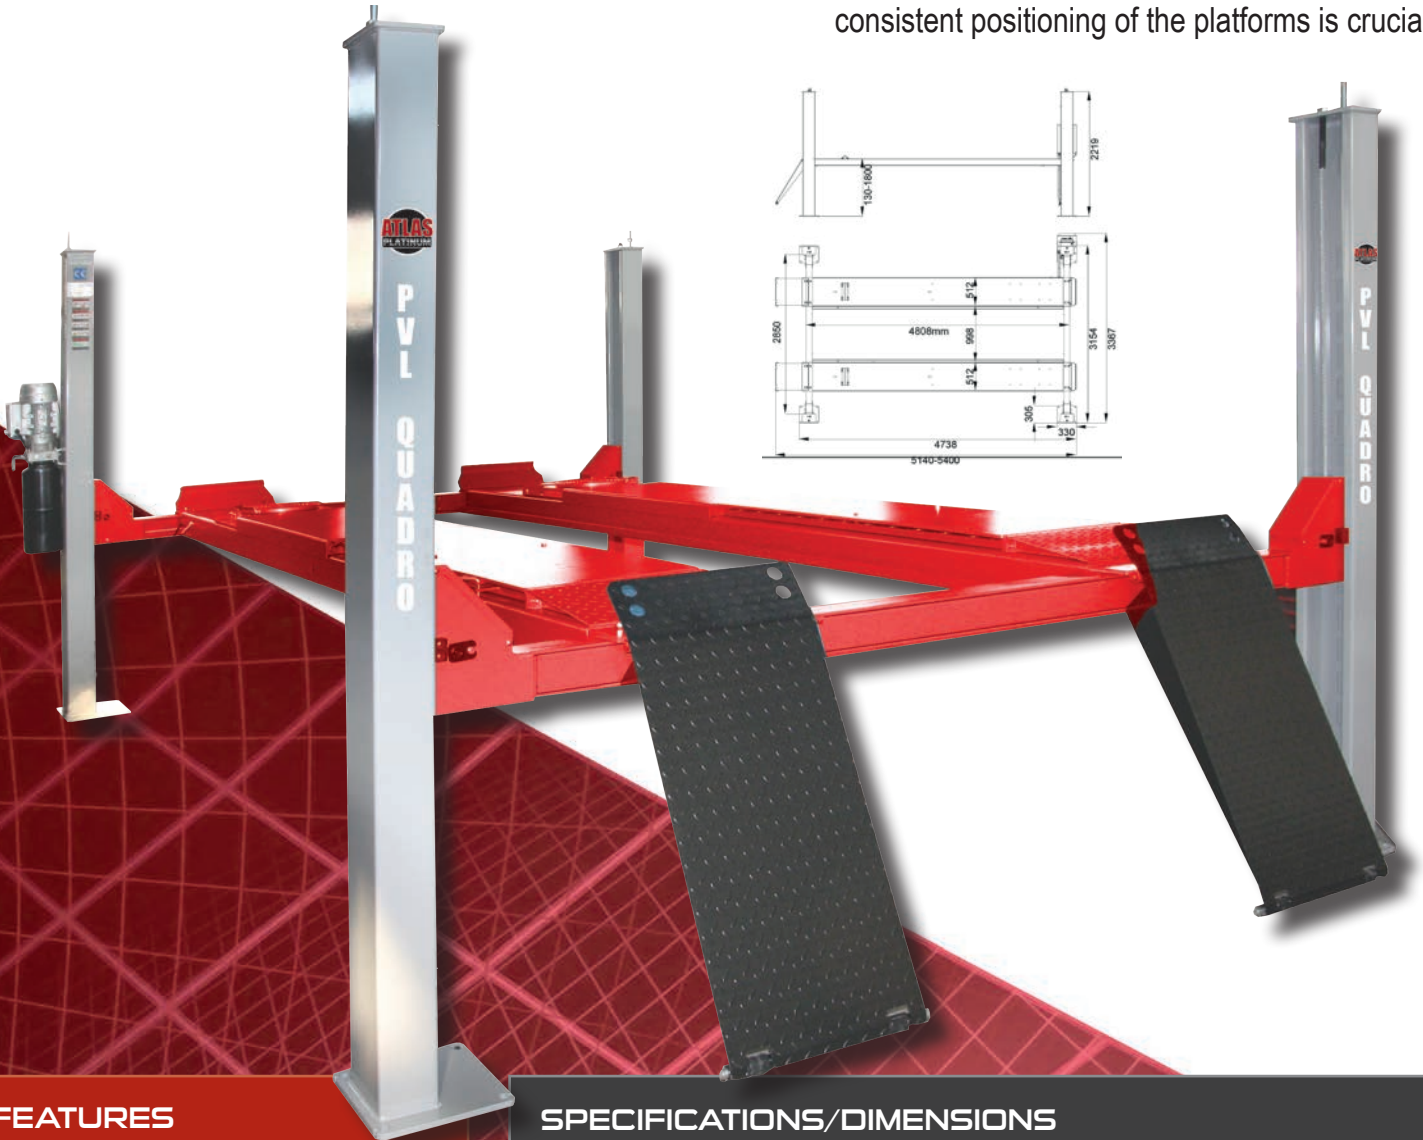

FEATURES

- Built-in rear slip plates and recesses for the turn plates
- Steel cables for mechanical synchronisation
- Mechanical lock with automatic engagement
- Air-operated lock release
- Pressure overload valve
- 24V safety control
- 2 year parts and labour warranty

SPECIFICATIONS/DIMENSIONS

	PVL QUADRO	PVL QUADRO/LP
Lift Capacity	4000kg	4200kg
Max. Raised Height: Standard Type	1800mm	1800mm
Min. Lowered Height: Standard Type	130mm	130mm
Runway Length	4506mm	4808mm
Runway Width	512mm	512mm
Width Between Two Columns	2850mm	2850mm
Overall Length	5140mm	5400mm
Overall Height	2263mm	2263mm
Overall Width	3154mm	3154mm
Raised Time	60 seconds	60 seconds
Noise Level	80 dB (A)/1m	80 dB (A)/1m
Rated Pneumatic Pressure	6bar-8bar	6bar-8bar
Working Temperature	10°C-40°C	10°C-40°C
Average Weight of Package Standard	1250kg	1210kg